



# PRINTDOT PY1901 Specification

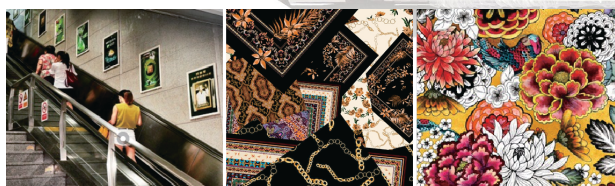

Machine Tyoe	A1/E1 Digital Inkjet Printer PY1901				
Print Head	<b>1H</b>				
Print Mode	360/1200 2p		360/1800 3p		360/2400 4p
Speed	45sqm/h		30sqm/h		25sqm/h
Print Width	1.9M (printing table 2.05meters)				
Printer Interface	GB NET WORK				
Media Transmission	Roll to Roll				
Data Transfer	Edge RIP while print / RIP post-print				
RIP Software	PHOTOPRINT,MAINTOP,NEOSTAMPA, WASATCH				
Heating System	Four-heating:Before printing,printing,printing post,Ink heating				
Drying System	Infrared drying and fan-air dry				
Cleaning System	Separation dual function of pressure and suction cleaning				
Material Systems	Normal double motor rewinder / swing roller tension rewinder / airshaft system,				
Ink Types	C,M,Y,K, LC, LM , O, R , G , B, fluorescent color				
Power Requirements	220 VAC , <4A, 50/60HZ + heater 220 VAC , <50A,50/60HZ				
Working Environment	Temperature:23°C ~ 28°C , Humidity:45%~55%RH				
Media Type	flex banner , vinyl , non- wooden cloth, wall paper , pp paper , sublimation paper				
Dimensions	2850*800*1500 mm(L*W*H)				
NW/GW	150KG/250KG				
Quality parts	German Igus drag chain Japan THK guide rail	German Igus Power cable Japan NSK bearing	Italy Elateck belt Japan Omron sesors	Full aluminum beam Smart pinch roller	Standard nagetive pressure Smart hot wind drying high efficient

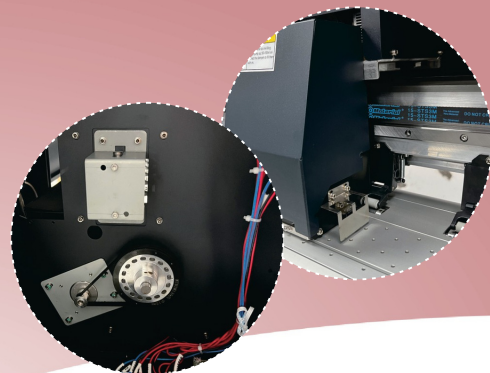